


Clausing Production Cold Saw

600 Group

*A Line of Affordable, Rugged Built,
Ferrous and Non-Ferrous Cutting
Production Circular Saws*

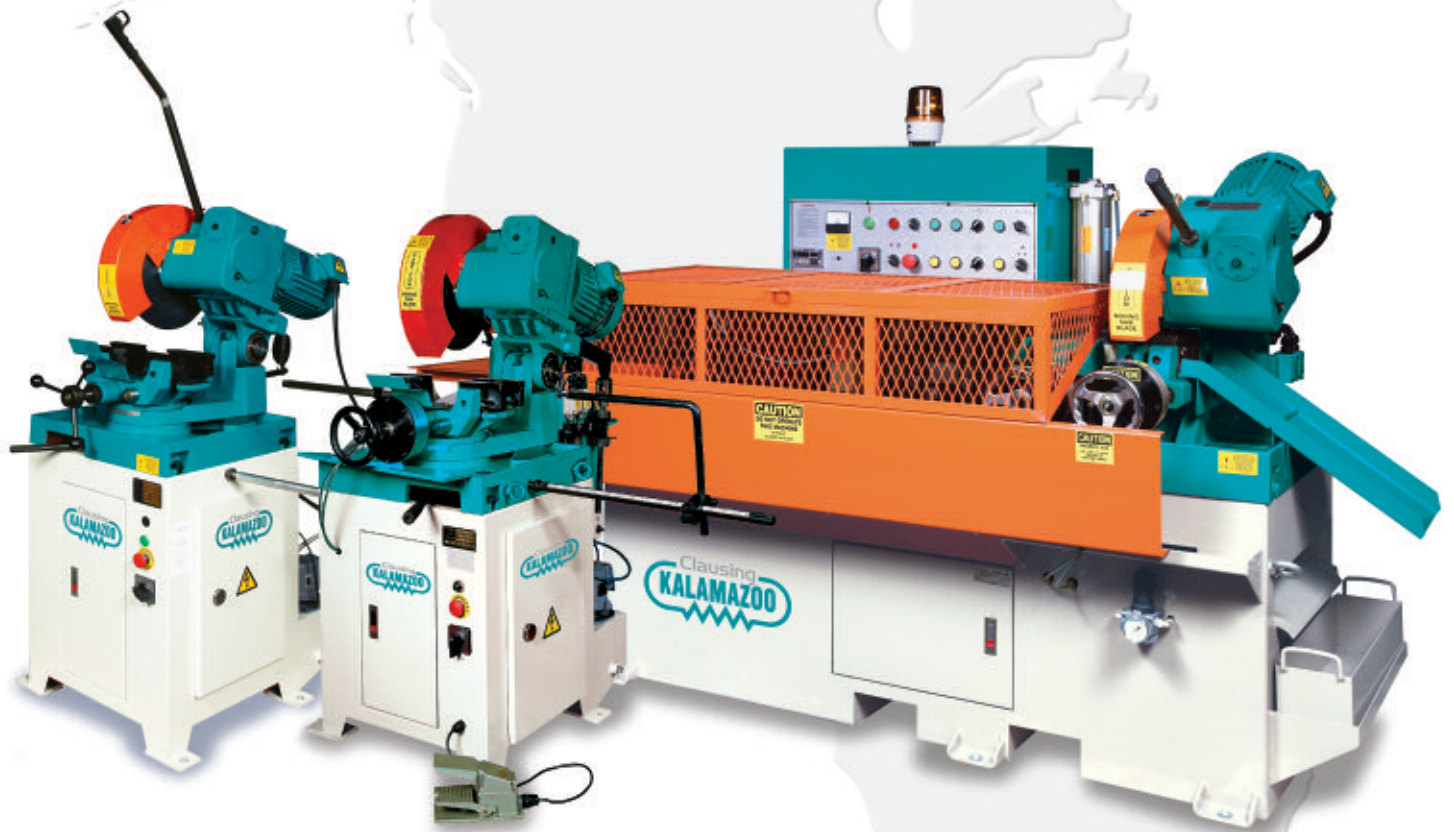

- Manual Cutting Machines
- Pneumatic Vise Cutting Machines
- Semi-Automatic Cutting Machines
- Automatic Cutting Machines

Clausing Kalamazoo Pneumatic Vice Ferrous Cutting Circular Saw

Features:

- 230v/460v/60/3 Electricals
- Triger Operated On Off in Handle Grip
- Totally Enclosed Fan-Cooled Motor
- Enclosed Worm Gear Drive for Trouble-free Operation
- Two Speeds for Versatility
- Cast Iron Construction
- Self-Centering Vise with Angle Scale
- Head Rotates 45 Degrees Left and Right of Center
- Flood Coolant System
- Heavy Duty Sheet Metal Base
- Adjustable Stock Stop
- Tool Kit
- Circular Saw Blade
- Operation and Maintenance Manual
- Two (2) Year Limited Warranty




Specifications:

Model	FHC350P
Drive Motor	2/3 Hp (1.4/2.2kw)
Angles (left & right)	45°
Electricals	230v. or 460v. - 3ph
Control	110v.
Coolant	Standard
Spindle Speeds	26/52 rpm
Max. Blade Size	10-14" (250-350mm)
Max. Vise Opening	6" (152mm)
Recommended Cutting Capacity	
Round tube @ 90°	4.33" (110mm)
Round tube @ 45°	2.95" (75mm)
Square tube @ 90°	4.33" (110mm)
Square tube @ 45°	3.54" (90mm)
Rectangular tube @ 90°	4.33" x 3.54" (110 x 90mm)
Rectangular tube @ 45°	4.33" x 2" (110 x 50mm)
Round solid @ 90°	2.36" (60mm)
Round solid @ 45°	2" (50mm)
Square solid @ 90°	2" (50mm)
Square solid @ 45°	1.77" (45mm)
Dimensions	
Machine Dimensions LxWxH	55" x 41" x 75" (1400 x 1050 x 1900mm)
Shipping Dimensions LxWxH	30" x 42" x 60" (750 x 1060 x 1510mm)
Net Weight	660 lbs. (300kg)
Shipping Weight	792 lbs. (360kg)

Optional Equipment:

- 5 foot roller stock table
- 10 foot roller stock table
- 37" - 46" stock stand
- 1 gallon SAWZIT saw lubrication
- 5 gallon SAWZIT saw lubrication

Capacity Charts:

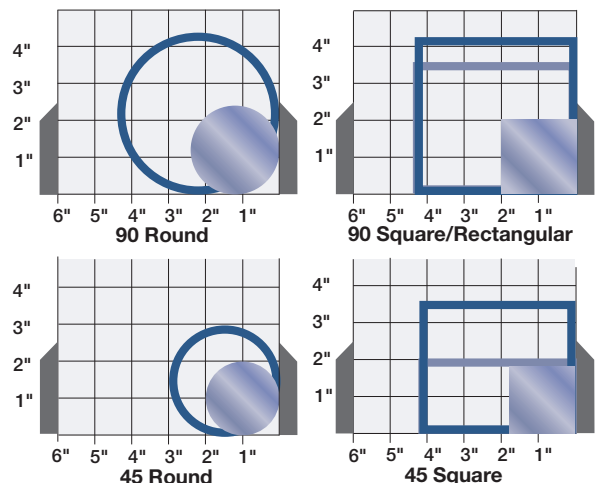

All specifications subject to change without notice or obligation.